


## FAD

Water proof, dust proof, anti corrosion maintenance free energy saving lamp (LED)



## 型号含义 Model implication

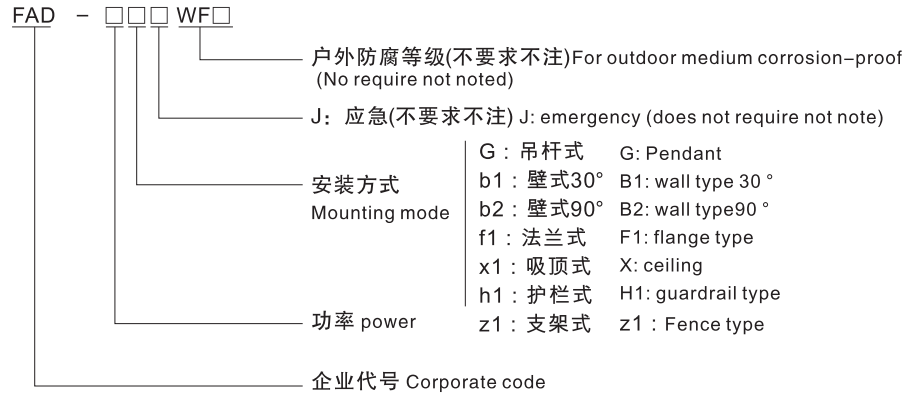

## 正常工作条件 Normal working conditions

- ◆ 安装地点的海拔不超过2000m;
- ◆ 周围环境温为-40℃ ~ +40℃, 且24h内的平均温度值不超过+35℃;
- ◆ 周围空气相对湿度不大于95%(+25℃)
- ◆ 在无剧烈振动、冲击及摇动的地方;
- ◆ 适用于20区、21区、21区粉尘类及T1 ~ T6组可燃性粉尘场所。

- ◆ Altitude of the installation site shall not beyond 2000m;
- ◆ Ambient temperature should be within -40℃ ~ +40℃, average temperature within 24h shall not exceed +35℃;
- ◆ Ambient air relative humidity shall not exceed 95% (+25℃);
- ◆ Installation site shall be free of severe vibration, shock or shake;
- ◆ It is applicable for combustible dust atmospheres zones 20, 21 and 22, and temperature classification from T1 to T6.

## FAD

### 防水防尘防腐免维护节能灯 ( LED)

### 产品结构性能 Product structure performance

- 1、灯具由光源腔，电器腔，接线腔构成，密闭式设计。
- 2、灯具由铝合金压铸成型，电器腔内含LED开关电源，接线端子等电器，接线腔内含用户接线端子，光源腔内部设有铝合金镜面反射器。钢化玻璃透光罩采用环氧树脂胶封，透光率高，抗冲击强。表面聚酯粉末喷涂(防腐型外壳经过特殊金属外处理再表面聚酯粉末喷涂)。
- 3、灯具外露紧固件采用优质不锈钢，安装有橡胶密封垫，密封可靠，防水防尘防腐性强。内置橡胶件，电线外皮，塑料全采用抗高温抗阻燃件，更安全可靠。
- 4、本灯具适用于管吊式，吸顶式、吸壁式、立杆式、支架式多种安装方式。
- 5、电源采用整体散热技术，短路、过流、过压、过温保护。
- 6、灯具具有长寿命、高亮度抗震性好、外观美观大方，长期使用免维护。是节能、环保理想的防爆灯具。

1. The lamp is composed of light source chamber, electric chamber and wiring chamber, enjoys sealed design.
2. The lamp enclosure is made of aluminum alloy by means of die-casting forming, with LED switching power supply, terminal blocks and other electrical devices inside the electric chamber, there are terminal blocks for user wiring in the wiring chamber, and has aluminum alloy specular reflector in the light source chamber. The housing is of good light transmittance and high shock resistance. The mesh enclosure is made of high quality stainless steel, its surface is treated with polyester powder coating (anti-corrosion enclosure also has been treated with special metallic processing before polyester powder coating).
3. The exposed fasteners are made of high quality stainless steel, are equipped with rubber gasket, with reliable sealing performance, excellent waterproof, dustproof and anti-corrosive properties. Built-in rubber parts, wire jacket, and plastics all use high-temperature resistant and flame retardant articles, safer and more reliable.
4. All kinds of installation ways are suitable, such as hanging type, ceiling type, wall-mounted type, post type, bracket type, etc.
5. The power supply adopts integral heat dissipation technology, with protections against short circuit, over current, over voltage, over heat, etc.
6. The lamp enjoys long service life, high brightness, good antiknock characteristic, elegant appearance, maintenance free. It is an ideal product for energy saving and environment protection.

**FAD**

Water proof, dust proof, anti corrosion  
maintenance free energy saving lamp (LED)

**主要技术参数 Main technical parameters**

型号/Model	FAD
执行标准/Implementation of standards	GB 12476(等效于IEC61241\EN系列标准)
额定电压/Rated voltage	90—264VAC or 127—300VDC
频率范围/Frequency range	47 – 63Hz
额定功率/Rated power	80w–120w
功率因数/PFC	≥0.95
电源效率/Power Efficiency	≥0.9
显色指数 (CRI)	≥80
浪涌电流/Inrush current	冷启动/Cold;30A(max)230VAC
安规/Safety Standards	UL8750,TUV EN61347-1,EN61347-2-13
电磁兼容性标准/EMC Standards	EN61000-3-2,TUV EN61347-1,EN61347-2-13
防护等级/Protection grade	IP66
防腐等级/The anti-corrosion class	WF2
进线口螺纹/Inlet thread	G20
电缆规格/Cable's spec	Φ 10 – Φ 14mm
安装方式/Installation	吊杆式、壁挂式、吸顶式、支架式
工作环境/Working Environment	温度:-40 ~ 45℃ 湿度: 10% ~ 90%
工作寿命/Work life	≥100000H
产品重量/Packing	6.2kg

**使用与维护 The use and maintenance**

- ◆ 防爆灯在使用前，首先要仔细检查铭牌内容与客户订货是否相符合；
- ◆ 防爆灯在安装时先将进线电缆通过引入装置接到接线腔的接线端子上，并压紧密封圈，使电缆密封好，接好接地线，紧固好螺钉，上述各项检查无误后，即可通电使用；
- ◆ 防爆灯不得随意拆卸，维护时，须断开前级电源后才可开盖检修；一般不需要检修本产品具有长寿命特点。
- ◆ 在维修过程中不得损坏密封橡皮，维修后涂204-1防锈油，合好盖，紧固后方可使用；
- ◆ 防爆灯应定期检查，清理透明件表面灰尘。
- ◆ 障碍物距防爆外壳大于30mm。

◆ Before putting into operation, please check the nameplate first to make sure that the parameters are what you ordered.

◆ Before installing the lamp, please connect the incoming cable to the terminal block in the wiring chamber through the entry device, compress the seal ring, well connect earth wire, and tighten the screws. Examine and make sure everything is right, then switch on the power supply.


# 防爆灯具

## FAD

防水防尘防腐免维护节能灯 ( LED)

- ◆ Don't disassemble the lamp randomly, when repairing, must cut off the power supply first before opening the cover for maintenance; usually it need not to repair, as it is featured with long service life.
- ◆ Pay attention to not hurt the explosion-suppression surface during maintenance, coat with anti-rust oil 204-1 after maintenance, close the clover, make sure to tighten it before using;
- ◆ Inspect the lamp regularly, clear away the dust from the transparent parts.
- ◆ Distance from the explosion-proof shell to the obstacle should be more than 30mm.

### 配光曲线 Distribution curve

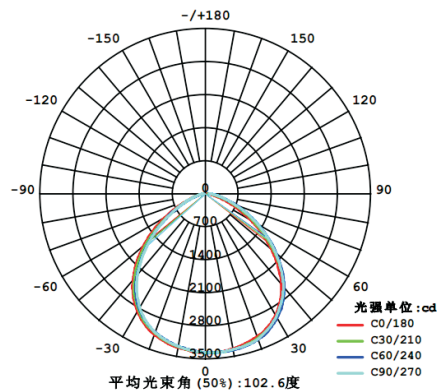


注：以上为标配配光曲线图，可根据客户配光要求定制。

Note: the distribute curve above is conventional, can be customized according to customer requirements.

FAD

Water proof, dust proof, anti corrosion maintenance free energy saving lamp (LED)

产品外形及安装示意图 Product appearance and installation diagram

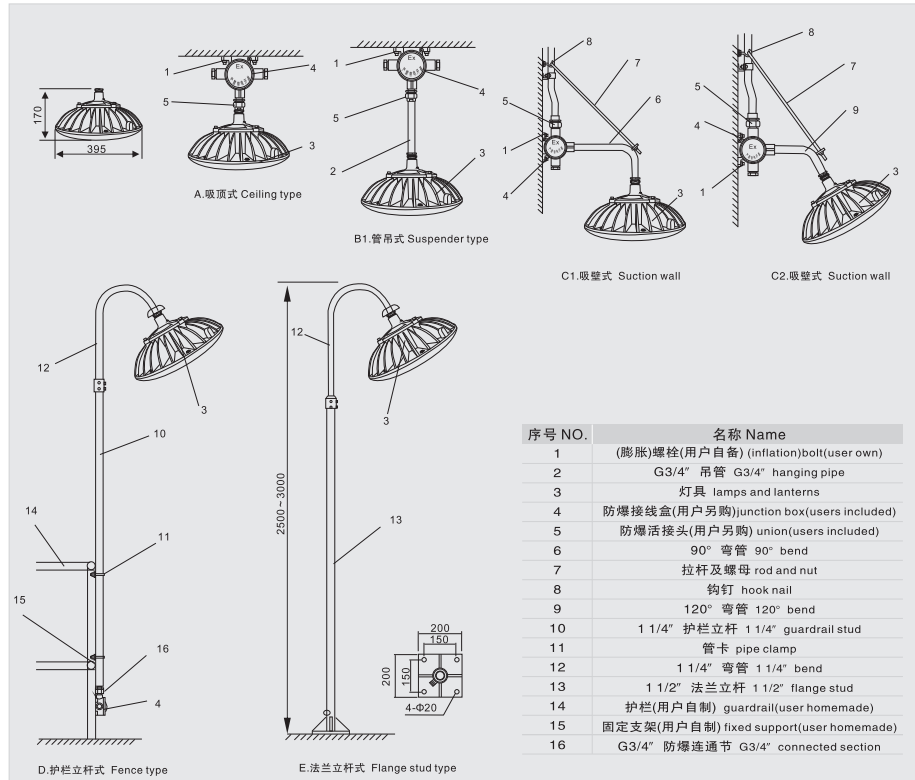

订货须知 Order note

- 1、客户在订货时请按照产品型号逐条选择。
  - 2、本灯具出厂时已配好电源和光源。
  - 3、灯具如经防震处理能适应较强振动环境下使用。
  - 4、灯具可选配130度至15度配光射角。
  - 5、灯具出厂3、4条如有需要，应在订货时说明。
1. Please select product according to the model description carefully.
  2. Power supply and light source have been prepared along with the lamp.
  3. It is suitable for strong vibration atmospheres after anti-shock treatment.
  4. Light angles 130° and 15° are optional.
  5. Please give clear indications if need abovementioned items 3 and 4 before leaving the factory.